

# LP Nest

The fixture emits an indirect, soft and symmetrical light.  
Reflections in the “lattice” create an attractive play of  
light within the fixture.



## Bystrup Arkitekter & Designere

The company was established in 1994 by Erik Bystrup. Erik Bystrup completed his architectural studies in 1968 and worked for Krohn & Hartvig Rasmussen and with Johann Otto von Spreckelsen, among others, before starting his own studio.



Tokyo  
International  
Airport,  
International  
Passenger  
Terminal



Jels Søbad

## Product info

### Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

### Information

Poles must be ordered separately. Mounting for pole Ø 115. For LED replacement kit please do contact Louis Poulsen. Dimming options CLO, and night time dimming (default setting: 50% power in 8 hours). All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. Driver: Location in the post top. Please contact Louis Poulsen for 2700K and more info about supported Light Management Systems.

### Mounting

Pole dimension: Ø 115mm Installation cable: 5m, 5x1mm<sup>2</sup> (Class I) or 5m, 4x1mm<sup>2</sup> (Class II). Driver: Location in the post top.

### Finish

Aluminium coloured with textured surface or graphite with textured surface, powder coated.

### Materials

Frame/Louvre: High pressure moulded aluminium. Top shade: Spun aluminium. Reflector: Anodised aluminium. Enclosure: Clear glass.

### Sizes and weights

Width x Height x Length (mm) | 750 x 330 x 750 Max 12.1 kg

### Class

Ingress protection IP66. Electric shock protection I w. ground, II w/o ground. IK09.

### Light source

LED 3000K 34W


Lumen: 2842

### Information

Poles must be ordered separately. Mounting for pole Ø 115. For LED replacement kit please do contact Louis Poulsen.

Dimming options CLO, and night time dimming (default setting: 50% power in 8 hours). All variants available with Zhaga socket for Smart City compatibility. Including CLO and night time dimming options. Driver: Location in the post top.

Please contact Louis Poulsen for 2700K and more info about supported Light Management Systems.

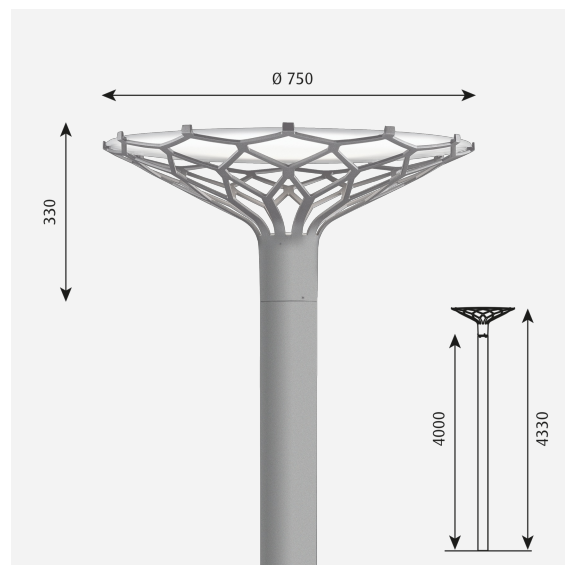

## Product variants

Colour	Light source	Lumen	Class	Lighting control
● Aluminium colour texture	LED 3000K 34W	2607	I	Dac: dali + clo
● Graphite grey texture	LED 4000K 34W	2674	II	Dpc: nightdim + clo
		2842		Sr 2xzhaga ct
		2915		

# Design

Bystrop Architects

# Weight


Min: 10.362 kg Max: 12.111 kg

# Finish


Aluminium colour texture, Graphite grey texture

# Light distribution diagrams

Cartesian

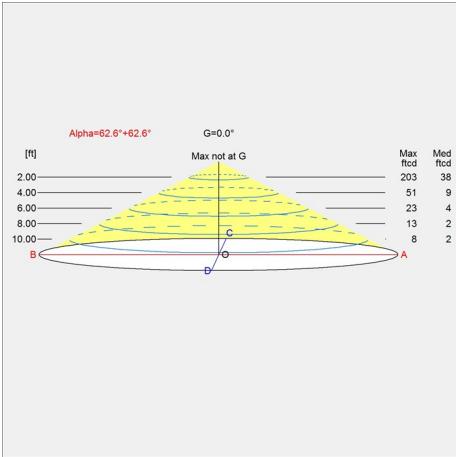

Isolux

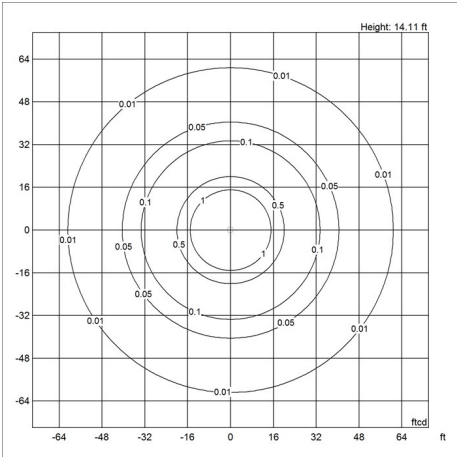

Polar

